

CQ-210

目录


1. 安全提示	
2. 开 检 查	
3. 产品介绍	
3.1	
3.2	
3.3	
3.4	
4. 安装说明	
4.1	
4.2	
4.3	
4.4	
5. 使用说明	
5.1	
5.2	
5.3	
5.4	
5.5	
6. 保修 务	
6.1	
6.2	

1. 安全提示

-
-
-
-
-
- 100%
- , M
-
-
-
-
-
-
-
- 2|47
-

2. 开 检查

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.




3. 产品介绍

3.1 产品用途


2001

3.2 原型图


3.2.1

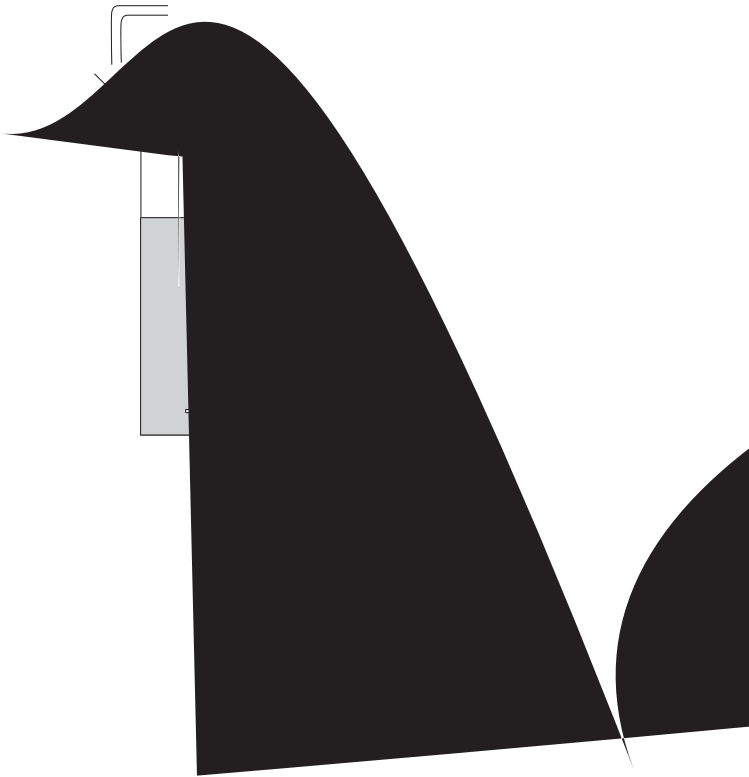

3.2.2



3.2.3

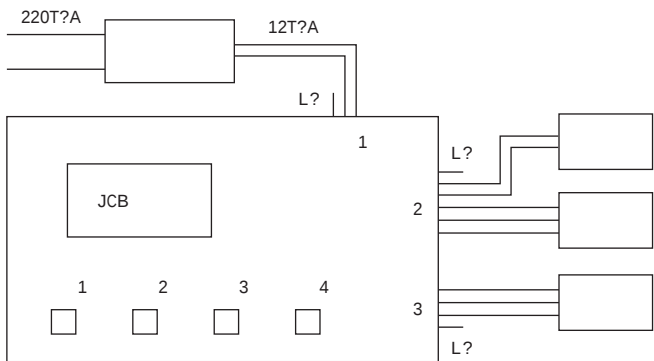

3.3 技术参数

	CQ-210
	3/4"(25 k k)@QNR
	0.14 0.35KN_
	0.7 k

3.4 主要成分或部件

		/			
1		0.6-0.6 k k		12J	10
2		250 k k 400 k k		1	10
3		25J		1	10
4		222 k k Ö 222 k k Ö 117 k k	+	1	10
5		Φ 25 k k	NTA	1	10
6		Φ 25	?@Q	1	10
5		Φ 25	?@Q	1	10

4. 安装说明

4.1 安装注意事项

-
-
- └). 55a k Ö 30a k
- ┘). 66a k
- a). 40-160a k


- b). 10.2a k
- c). / 220T|50Fx
- d). 6U
- e). 2 k
- f).
- h). 4¹A 36¹A
- i). 0.14KN_ 0.35KN_

- 2¹A 47¹A
-
-
- 40-160a k 10a k
-
- 0.14 0.35KN_
-
-
-
- 10
- W
- 6 k

4.2 安装准备

工具准备：

4.3 安装示意图

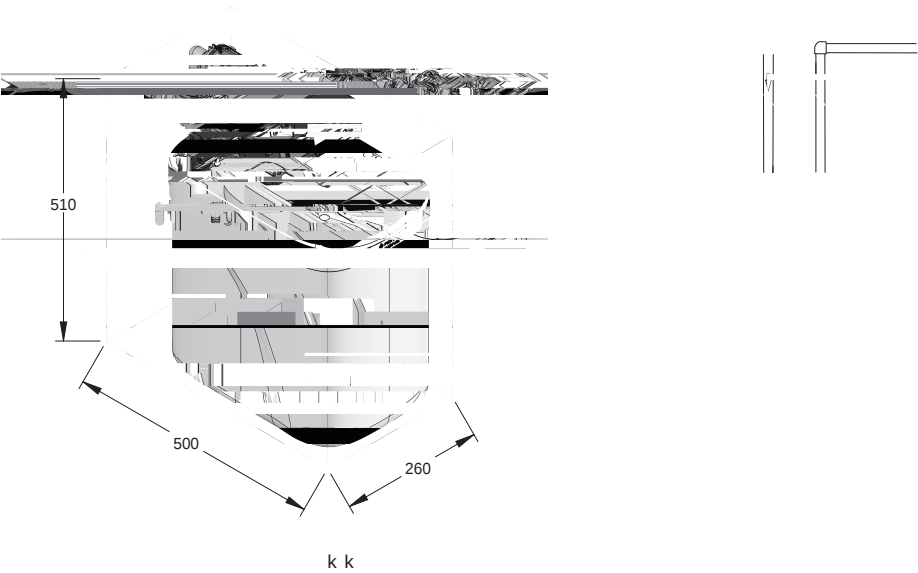

4.4 安装步骤


4.4.1

接入接头前注意：

M
100% M

需移除卡夹时：

4.4.2



4.4.3

- 1/2"
-



4.4.4

5



5.1.3

2 00)

5.1.4

- 1.
- 2.
- 3.
- 4.



3



3


A1

A2


2 3

3

5.1.5

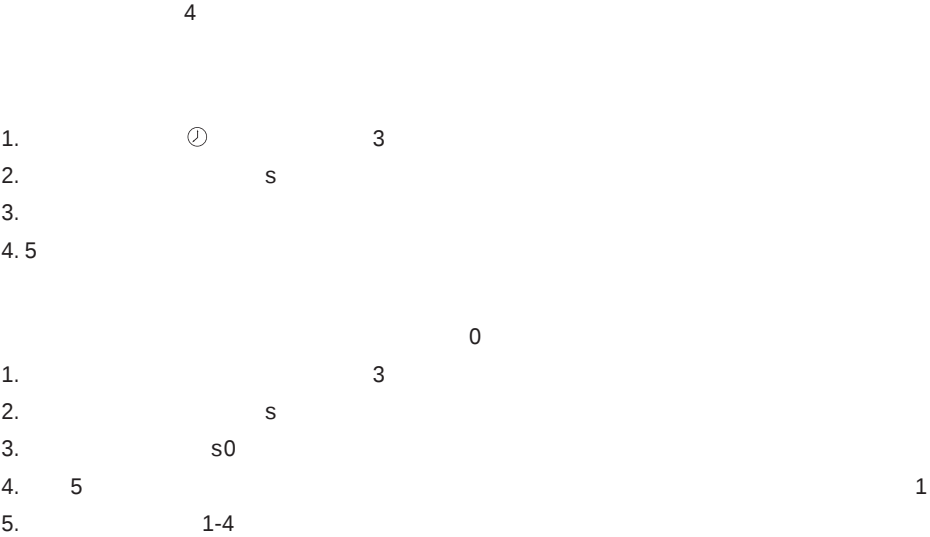

5.1.6

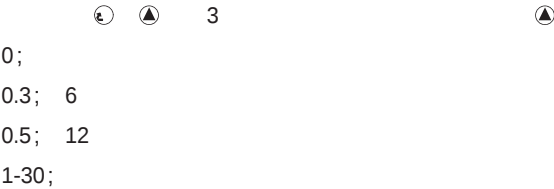

- Cpp3
- s1 0.6ie

CQ-210	
nn k	R
50	6.00
100	4.00
150	2.65
200	2.00
250	1.60
300	1.33
350	1.14
400	1.00
450	0.67
500	0.60
550	0.53
600	0.65
650	0.62
500	0.55
550	0.53
600	0.50
ie	0.6

4|5J

○ 3 Y [A1 1/4

-   A2
-  

A5



5.1.6

/

5.2 使用方法

:0.3ke/J

x

:3LRS

0.14KN_

—

•

220T|50Fx

6

6

6

•

1.5

•

•



3

30



5



F2


4



F1		
F2		/
F3		
F4	2:00	7,777 65,535
F5		
?0	0	
?1	1	
?2	2	
?3	3	
?4	4	
?5	5	
?6	6	

5.5 故障诊断及排除

	#4	
	#4	
	M	M
		20 nqg 1.3 ` _p

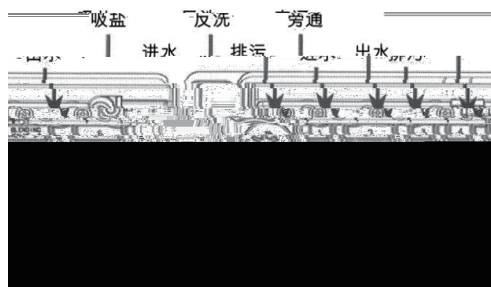

● -

		Cpp 1
		1.

6. 保修 务

6.1 保修卡



保 修 卡

1

1

2

3

4

-
-
-
-
-
-
-

5

6


5

6

600-620-6651

400-620-6651

07:00-17:00



EVERP

351

215011

600-620-6651

400-620-6651

uuu.nclr_gpu_rcp.al